

MAC-10D-WV Diesel Transporter



West Virginia APPROVED

- Four-wheel fully enclosed spring applied wet disc brakes.
- Soft Ride five point rubber mounted front suspension with Air-Ride.
- Hydrostatic transmission with 14,000# planetary wheel units.
- Deutz 74 hp Diesel Engine.
- Fourteen passengers.
- Automatic parking brake.
- **New** Swing Coil Rear Suspension for Superb Ground Clearance.
- Two Speed: 17/11 MPH.
- Automatic/Manual Fire Suppression system.
- Engine in rear provides traction, ease of service, and places noise behind passengers.
- Combifilter after treatment system to comply with WV regula-




DAMASCUS
Corporation

"We get around UNDERGROUND!!"



Phone: 276-676-2376 or 800-390-7636
Mailing Address:
PO Box 610
Abingdon, VA 24212
<http://www.damascuscorp.com>

Fax: 276-676-0300
Shipping Address:
26864 Watauga Road
Abingdon, VA 24211
e-mail: sales@damascuscorp.com

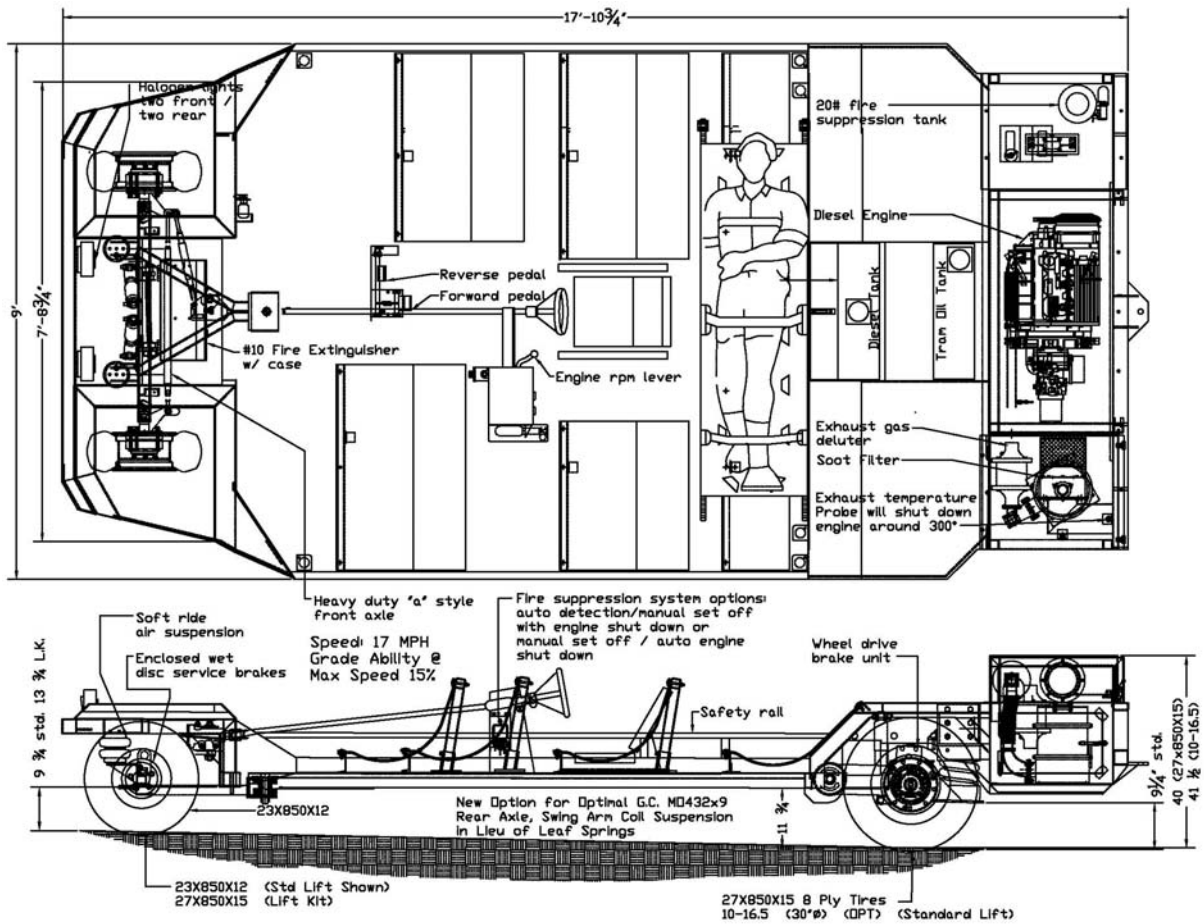

Specifications: MAC-10D-WV Diesel Transporter

<p>Dimensions:</p> <p>Height: 37" min. Width: 8'-0" or 9'-0" Length: 17'-10 3/4"</p> <p>Turning Radius: 15' I.S. Ground Clearance: 9" Standard</p> <p>Weight: 6000#</p> <p>Payload: 3500#, 14 passenger</p> <p>Performance: Speed 15 max., maximum operating grade 18%</p> <p>Engine: Deutz BF4L2011 74 HP. Emissions package include S-9 combi-filter, purifier and is subject to approval by the West Virginia Diesel committee. Meets MSHA requirements under part 7, title 30 CFR for out-by use only.</p> <p>Electrical: 12 Volt</p> <p>Headlights: Two front, two rear, halogen, 12volt</p> <p>Brakes: Four-wheel wet disc brakes, spring applied, pressure release w/ automatic parking brake feature, rear hydrostatic holdback.</p>	<p>Drive: Hydrostatic, using dual wheel drive units with integral spring-applied brake mounted on support tube. Wheel unit capacity 14,000 lbs</p> <p>Suspension: Front – Rubber mounted A frame style axle with new Soft Ride air suspension and heavy-duty gas shocks. Automotive type tie rods Rear – HD Swing Arm Coil Suspension w/ heavy duty gas shocks Optimizing Superb Ground Clearance In Lieu of Leaf Springs</p> <p>Fire Suppression: Standard - Ansul automatic/manual actuated with engine shutoff "Check Fire System"</p> <p>Fire Extinguisher: #10 fire extinguisher, bracket and guard</p> <p>Tires: Front: 23x850x12 -6 Ply / 27x850x15 -8 Ply Rear: 27x850x15 -8 Ply / 10-16.5 -8 Ply</p> <p>Capacities: Diesel fuel – 12.25 gallons. Hydraulic oil – 12.6 gallons</p> <p>Options: Canopy, SCSR Storage, Seating, and Tires. Contact Mfg. for more...</p>
---	--