## Lil'MAC Model LMJ4 PA Rescuer



- 600 amp Millipak controller
- No forward/reverse contactors
- Powerful and reliable 6 h.p. tram mo- •
- Heavy-duty, seven point, rubbermounted front suspension with coilover shocks
- 1600# rear Axle and bearings
- Cargo spaces to carry your tools, etc.

- Adjustable stretcher mounts for either backboard or canvas
- Bed designed to carry first aid station container
- Local Damascus distributors you know and trust to give service after the sale



"We get around UNDERGROUND!!"

Phone: 276-676-2<mark>376 or 800-390-7636</mark>


Mailing Address: PO Box 610


Abingdon, VA 24212

http://www.damascuscorp.com



Fax: 276-676-0300 Shipping Address: 26864 Watauga Road Abingdon, VA 24211 e-mail: damascus@naxs.com

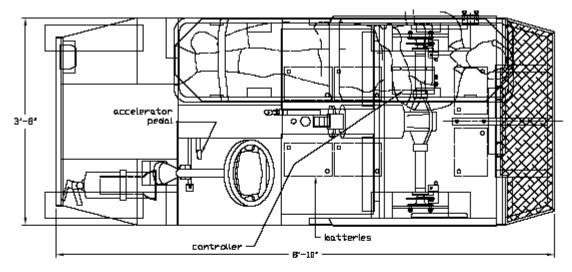

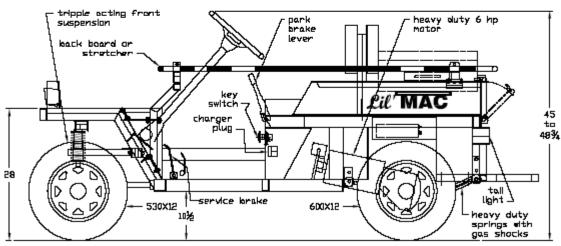

## Specifications: Lil'MAC Transporter Model LMJ4-PA Rescuer

Dimensions: Height: 48 3/4"" std. to top of steer-

ing wheel. Min. seam height of 65"

Width: 3'-8" Length: 10'-7 34"

Turning radius: 12' I.S.

**Ground Clearance:** 10 1/2" standard

8 1/2" w/ smaller tires

Weight: 1165 pounds

Electrical:

Payload: 2 person plus tools and equipment

> 36 Volt 600 amp controller, no F/R contactors, manual battery discon-

> > nect

6-6 volt 115 minute @ 75 amps **Batteries:** 

**Battery Charger:** Lester Electrical Charger. Constant

voltage

Input: 115 volt -10 amp Output: 48 volt - 18 amps. Tram Speed: 10 miles per hour, approx.

Options: Seats, canopy, tires, lift kit, strobe Light.

Headlights: One front/rear, 36v

6 horsepower - continuous—TENV- bar Motor:

wound—heavy duty brush rigging

Brake: Hydraulic caliper brake @ each rear wheel,

Mechanical park brake mounted on motor

armature shaft.

Rear Axle: 1600# rear axle with tapered roller bearings.

Grease fittings at wheel bearings.

Front Suspension: Triple acting front suspension is rubber

mounted for a smooth maintenance free

ride.

Heavy duty leaf springs with gas shocks. **Rear Suspension:** 

Front: 530x12—6 ply rating 10 1/2" g.c. Tires:

> 570 x 8 - 6 ply rating 8 3/4" g.c. Rear: 600x12— tractor tread 10 1/2" q.c.

18x9.50x8 - tractor tread 8 1/2" g.c.