MAC-8D-WV-PA Diesel Transporter



- Four-wheel drive with enclosed spring applied wet disc brakes
- Front Soft Ride five point rubber mounted front suspension with Air-Ride
- Rear Swing Arm Coil Suspension
- Hydrostatic transmission with 15,000# planetary wheel units
- Deutz 74 hp Diesel Engine
- Four passengers

- Automatic parking brake
- Speed: 11 to 17 MPH
- Automatic/Manual Fire Suppression system
- Engine in rear provides traction, ease of service, and places noise behind passengers.
- Combifilter after treatment system to comply with WV and PA regulations.



DAMASCUS

Corporation

"We get around UNDERGROUND!!"

Phone: 276-676-2376 or 800-390-7636

Mailing Address: PO Box 610


Abingdon, VA 24212


http://www.damascuscorp.com



Fax: 276-676-0300 Shipping Address: 26864 Watauga Road Abingdon, VA 24211

e-mail: sales@damascuscorp.com

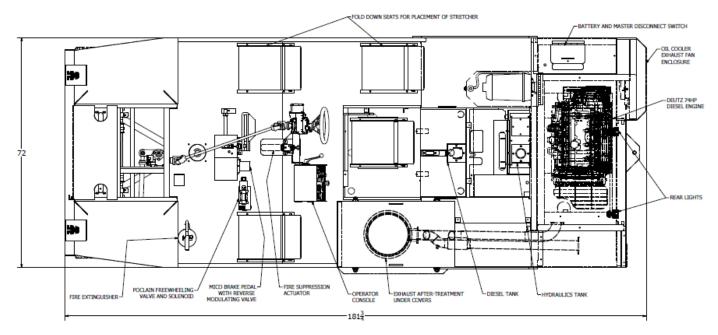

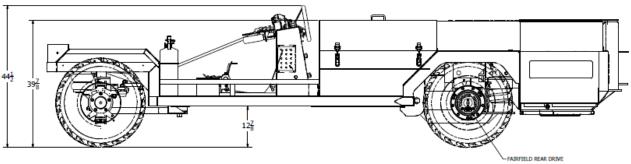

Specifications: MAC-8D-WV Diesel Transporter

Dimensions: Height: 39 7/8" (37" min.)

Width: 6'-0" Length: 15'-1 34"

Turning Radius: 12'-6" I.S. Ground Clearance: 9" Standard

Weight: 3500#

Payload: 1500#, 4 passenger

Performance: Speed 15 max., maximum operating grade

18%

Engine: Deutz BF4L2011 74 HP. Emissions package

include S-9 combi-filter, purifier and is subject to approval by the WV Diesel committee and PA DEP. Meets MSHA requirements under part 7, title 30 CFR for

out-by use only.

Electrical: 12 Volt

Headlights: Two front, two rear, halogen, 12volt

Brakes: Four-wheel wet disc brakes, spring applied,

pressure release w/ automatic parking brake

feature, hydrostatic holdback.

Drive: On demand 4WD. Hydrostatic, using four

wheel drive units with integral spring-applied brake. Wheel unit capacity 15,000 lbs. Rear

positive traction.

Suspension: Front – Rubber mounted A frame style axle

with new Soft Ride air suspension and heavyduty gas shocks. Automotive type tie rods Rear – HD Swing Arm Coil Suspension

Real - HD Swilly Allii Coll Suspension

Fire Standard - Ansul automatic/manual actuated Suppression: with engine shutoff "Check Fire System"

Fire #20 fire extinguisher, bracket and guard

Extinguisher:

Tires: Front: 27x850x15 -8 Ply

Rear: 27x850x15 -8 Ply

Capacities: Diesel fuel – 9 gallons. Hydraulic oil – 9

gallons

Options: Canopy, SCSR storage, seating, tires,

stretcher, LED lights, safety chains, strobe

lights, back-up alarm, on-board air

compressor for air bags, winch, trailer hitch,

and power inverter