

MAC-8D-WV Diesel Transporter



- Four-wheel fully enclosed spring applied wet disc brakes.
- Soft Ride five point rubber mounted front suspension with Air-Ride.
- Hydrostatic transmission with 14,000# planetary wheel units.
- Deutz 74 hp Diesel Engine.
- Four passengers.
- Automatic parking brake.
- Low Speed: 11 MPH.
- High Speed: 17 MPH.
- Automatic/Manual Fire Suppression system.
- Engine in rear provides traction, ease of service, and places noise behind passengers.
- Combifilter after treatment system to comply with WV regulations.




DAMASCUS
Corporation

"We get around UNDERGROUND!!"



Phone: 276-676-2376 or 800-390-7636
Mailing Address:
PO Box 610
Abingdon, VA 24212
<http://www.damascuscorp.com>

Fax: 276-676-0300
Shipping Address:
26864 Watauga Road
Abingdon, VA 24211
e-mail: sales@damascuscorp.com

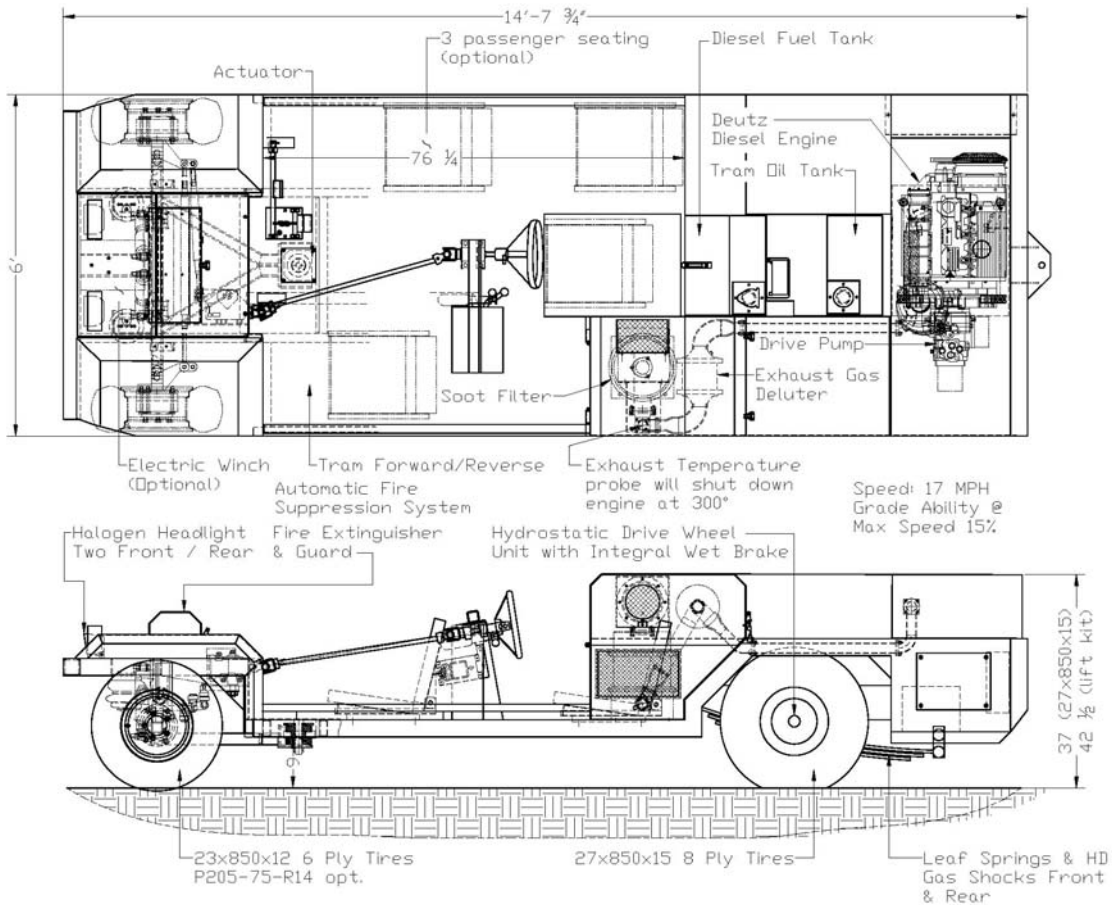

Specifications: MAC-8D-WV Diesel Transporter

| | | | |
|--------------|--|--------------------|--|
| Dimensions: | Height: 37" min. Width: 6'-0" Length: 14'-7 3/4" | Drive: | Hydrostatic, using dual wheel drive units with integral spring-applied brake mounted on support tube. Wheel unit capacity 14,000 lbs |
| | Turning Radius: 12'-6" I.S. Ground Clearance: 9" Standard | Suspension: | Front – Rubber mounted A frame style axle with new Soft Ride air suspension and heavy-duty gas shocks. Automotive type tie rods Rear – HD leaf springs with heavy duty gas shocks and rubber overload bumpers |
| Weight: | 3500# | Fire Suppression: | Standard - Ansul automatic/manual actuated with engine shutoff "Check Fire System" |
| Payload: | 1500#, 4-6 passenger | Fire Extinguisher: | #10 fire extinguisher, bracket and guard |
| Performance: | Speed 15 max., maximum operating grade 18% | Tires: | Front: 23x850x12 -6 Ply / 27x850x15 -8 Ply Rear: 27x850x15 -8 Ply / 10-16.5 -8 Ply |
| Engine: | Deutz BF4L2011 74 HP. Emissions package include S-9 combi-filter, purifier and is subject to approval by the West Virginia Diesel committee. Meets MSHA requirements under part 7, title 30 CFR for out-by use only. | Capacities: | Diesel fuel – 9 gallons. Hydraulic oil – 9 gallons |
| Electrical: | 12 Volt | Options: | Canopy, SCSR Storage, Seating, and Tires. Contact Mfg. for more... |
| Headlights: | Two front, two rear, halogen, 12volt | | |
| Brakes: | Four-wheel wet disc brakes, spring applied, pressure release w/ automatic parking brake feature, rear hydrostatic holdback. | | |