

MAC-3D 2-4 Man Diesel



Small, Powerful and built Mine Tough. . .

Features include:


- Narrow 5' width
- Four-wheel fully enclosed spring applied wet disc brakes.
- Soft Ride five point rubber mounted front suspension with Air-Ride.
- Hydrostatic drive wheel units
- MSHA approved Deutz engine 48HP
- Automatic parking brake.
- Speed: 15 MPH.
- Grade Ability at Max speed 15%.
- Manual or Automatic/Manual Fire Suppression system.
- Engine in rear provides traction and ease of service.

DAMASCUS
Corporation

Phone: 276-676-2376 or 800-390-7636
Mailing Address:
PO Box 610
Abingdon, VA 24212
<http://www.damascuscorp.com>

"We get around UNDERGROUND!!"

Fax: 276-676-0300
Shipping Address:
26864 Watauga Road
Abingdon, VA 24211
e-mail: sales@damascuscorp.com

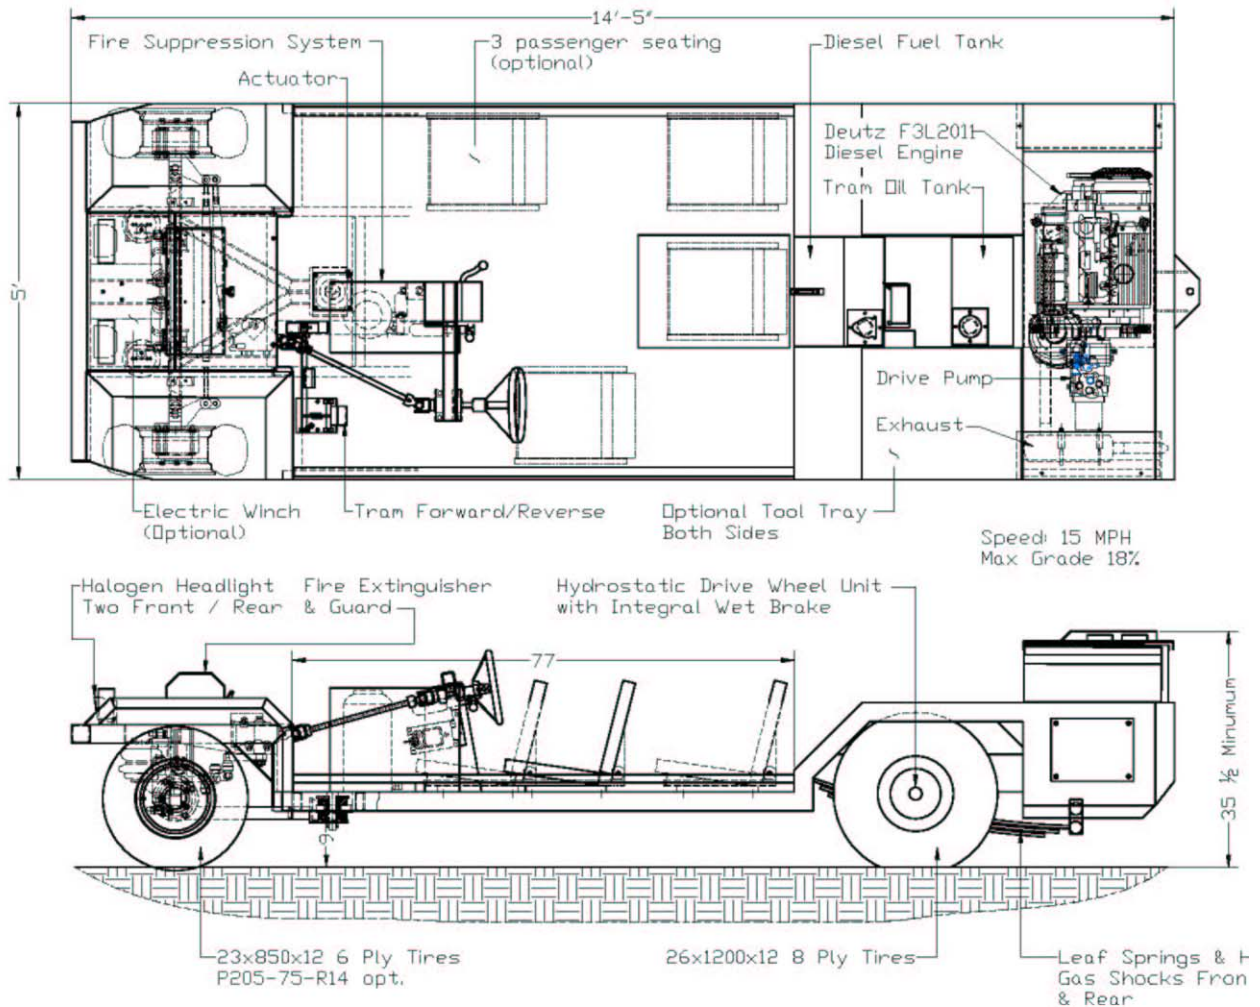

MAC-3D Soft Ride Diesel Transporter

Dimensions:	Height: 35 1/2" Min. Width: 5'-0" Length: 14'-5" Turning Radius: 12' I.S. Ground Clearance: 9" Standard	Drive:	Hydrostatic, using dual wheel drive units support tube and integral spring-applied brake, Wheel unit capacity 4500 lbs.
Weight:	2000#	Suspension:	Front - Rubber mounted A frame style axle with Soft Ride air suspension and heavy-duty gas shocks. Automotive Type tie rods. Rear - HD leaf springs with heavy duty gas shocks and rubber overload bumpers.
Payload:	2000#, 4 Passengers	Fire Suppression:	Standard - Ansul manual actuated with engine shutoff. Optional - Ansul automatic/manual actuated with engine shutoff "Check Fire System"
Performance:	Speed 15 mph max., Maximum operating grade 18%	Fire Extinguisher:	#10 fire extinguisher, bracket and guard
Engine:	Deutz F3L2011, 3 cylinder, 48 HP at 2800 rpm, oil cooled, heavy duty industrial design, meets MSHA requirements for use in underground mining under Part 7, Title 30 CFR. Outby use only	Tires:	Front: 23x850x 12 -6 ply or 27x850x15 8-Ply Rear: 26x12x12 -8 Ply or 10-16.5 8-Ply
Electrical:	12 Volt	Capacities:	Diesel fuel - 9.85 gallons. Hydraulic oil -9.6 gallons
Headlights:	Two front, two rear, halogen, 12volt	Options:	Canopy, Seating, Winch, SCSR Storage, and Tires. Contact Mfg. For more...
Brakes:	Four-wheel wet disc brakes, spring applied, hydraulic release w/ automatic parking brake feature, Rear hydrostatic holdback.		